

TLE-US-MM
MiniStarUS-MM™

LED Conversion Kit

For Streamlight® UltraStinger®

**300
LUMENS***

LEDSense™ over-temperature protection

Virtually unbreakable LED won't burn out

Smart electronics for exceptional battery life and constant light output

Up to 1.5x brighter than standard bulbs

Runtime - MultiMode

High - 3.5 Hrs. | 300 Lumens

Low - 9.0 Hrs. | 150 Lumens

Moon - 24 Hrs.

TerraLUX®



TerraLUX®

*LED Manufacturer's Rating


MiniStar™ LED Conversion Kits

Check out our full line of premium LED flashlights, worklights and LED conversion kits for your existing flashlights. Don't settle for anything less than TerraLUX professional grade lighting products.

**For Use in Streamlight®
UltraStinger® Flashlights Only**

To install LED:

1. Unscrew head of flashlight, remove original bulb and spring. Leave the O-ring in place.
2. Align the TLE-US-MM so the half circular notch on outer edge of the heat sink is pointing toward exposed screw on the inside of the flashlight.
3. Carefully install TLE-US-MM so that the bottom pins engage into the battery connector of flashlight without twisting.
4. Test installation by turning flashlight on. If there is no light output, check orientation & gently push down on TLE-US-MM to ensure battery contact is being made.
5. Re-install spring around the outer plastic housing of the TLE-US-MM & re-install the head.
6. Your flashlight is ready to use.

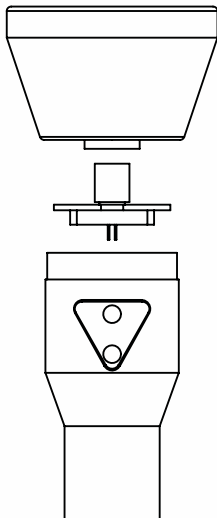

U.S. Patent Numbers:
7699494
Additional Patents Pending

TerraLUX

TerraLUX, Inc.
1830 Lefthand Circle, Suite B
Longmont, CO 80501

©2011 TerraLUX, Inc.
All rights reserved.



022000056 Rev B

1 Year Limited Warranty



www.TerraLUX.com